




Specification of Magnetic Powder Core

Mirrack
[www.mirrack.com\(CN\)](http://www.mirrack.com(CN))
[www.mirrack.com.cn\(EN\)](http://www.mirrack.com.cn(EN))

Part Number	Product Series	Permeability (u)	A _L (nH/N ²)	Coating Color	Coating Material	Coating Breakdown Voltage
MKU508-026	MKU	26	32 ± 8%	Brown	Epoxy	1.5KVac / 0.5mA / 3sec
Description	Toroidal MKU Core					

Core Dimensions

Dimensions	Before Coating		After Coating		Min / Max
	inch	mm	inch	mm	
OD	2.000	50.80	2.035	51.69	Max
ID	1.250	31.80	1.218	30.94	Min
HT	0.530	13.50	0.565	14.35	Max

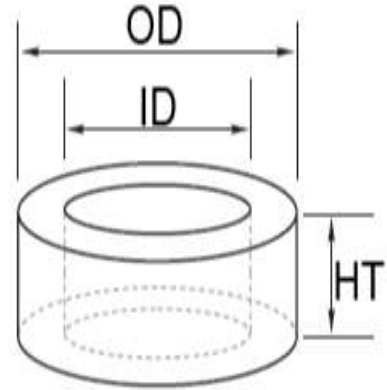

Physical Characteristics & Packaging

Path Length Le (cm)	Cross Section Ae (cm ²)	Core Volume Ve (cm ³)	Window Area Wa (cm ²)	Weight (g)	Box QTY (pcs)
12.730	1.251	15.930	7.500	104.5 ± 5%	120

Electrical Features (@25°C±2°C)

Test Item	Condition	Value (Typical)
Inductance	∅1.0 mm, 50TS, 100KHz, 1.0V, 0A	80uH±8%
DC-Bias	∅1.0 mm, 50TS, 100KHz, 1.0V, I _{DC(100 Oe)} = 20.27 A	82% Min
Core Loss	∅1.0mm, 50TS, 50KHz, 1000Gauss	670mW/cm ³ Max
Hi-Pot	1.5KVac, 0.5mA, 3 sec	PASS

DC Bias Curves

