




## Specification of Magnetic Powder Core

Mirrack  
[www.mirrack.com\(CN\)](http://www.mirrack.com(CN))  
[www.mirrack.com.cn\(EN\)](http://www.mirrack.com.cn(EN))

Part Number	Product Series	Permeability (u)	$A_L$ (nH/N <sup>2</sup> )	Coating Color	Coating Material	Coating Breakdown Voltage
MKS112-026	MKS	26	11 ± 8%	Black	Epoxy	800Vac / 0.5mA / 3sec
Description	Toroidal Sendust Core					

### Core Dimensions

Dimensions	Before Coating		After Coating		Min / Max
	inch	mm	inch	mm	
OD	0.440	11.20	0.468	11.89	Max
ID	0.250	6.35	0.232	5.89	Min
HT	0.156	3.96	0.186	4.72	Max

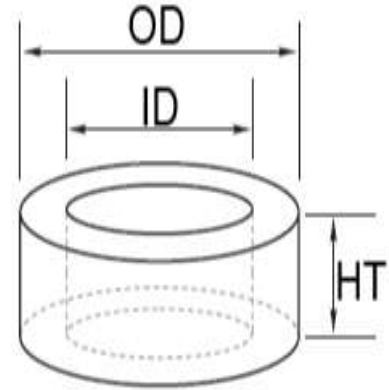

### Physical Characteristics & Packaging

Path Length Le (cm)	Cross Section Ae (cm <sup>2</sup> )	Core Volume Ve (cm <sup>3</sup> )	Window Area Wa (cm <sup>2</sup> )	Weight (g)	Box QTY (pcs)
2.690	0.090	0.243	0.273	1.5 ± 5%	10000

### Electrical Features (@25°C ± 2°C)

Test Item	Condition	Value (Typical)
Inductance	∅0.5mm, 30TS, 100KHz, 1.0V, 0A	9.9uH ± 8%
DC-Bias	∅0.5 mm, 30TS, 100KHz, 1.0V, I <sub>DC(100 Oe)</sub> = 7.17 A	75% Min
Core Loss	∅0.5mm, 30TS, 50KHz, 1000Gauss	650mW/cm <sup>3</sup> Max
Hi-Pot	800Vac, 0.5mA, 3 sec	PASS

### DC Bias Curves

