




## Specification of Magnetic Powder Core

Mirrack  
 www.mirrack.com(CN)  
 www.mirrack.com.cn (EN)

Part Number	Product Series	Permeability (u)	$A_L$ (nH/N <sup>2</sup> )	Coating Color	Coating Material	Coating Breakdown Voltage
MKS172-075	MKS	75	53±8%	Black	Epoxy	800Vac / 0.5mA / 3sec
Description	Toroidal Sendust Core					

### Core Dimensions

Dimensions	Before Coating		After Coating		Min / Max
	inch	mm	inch	mm	
OD	0.680	17.30	0.710	18.03	Max
ID	0.380	9.65	0.355	9.02	Min
HT	0.250	6.35	0.280	7.11	Max

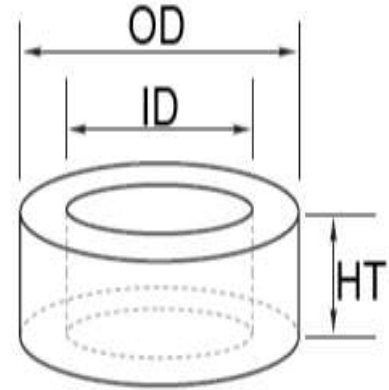

### Physical Characteristics & Packaging

Path Length Le (cm)	Cross Section Ae (cm <sup>2</sup> )	Core Volume Ve (cm <sup>3</sup> )	Window Area Wa (cm <sup>2</sup> )	Weight (g)	Box QTY (pcs)
4.140	0.232	0.960	0.638	6.0±5%	4000

### Electrical Features (@25°C±2°C)

Test Item	Condition	Value (Typical)
Inductance	∅0.5mm, 50TS, 100KHz, 1.0V, 0A	132.5uH±8%
DC-Bias	∅0.5 mm, 50TS, 100KHz, 1.0V, I <sub>DC(100 Oe)</sub> = 6.62 A	38% Min
Core Loss	∅0.5mm, 50TS, 50KHz, 1000Gauss	320mW/cm <sup>3</sup> Max
Hi-Pot	800Vac, 0.5mA, 3 sec	PASS

### DC Bias Curves

