




## Specification of Magnetic Powder Core

Mirrack  
[www.mirrack.com\(CN\)](http://www.mirrack.com(CN))  
[www.mirrack.com.cn\(EN\)](http://www.mirrack.com.cn(EN))

Part Number	Product Series	Permeability (u)	A <sub>L</sub> (nH/N <sup>2</sup> )	Coating Color	Coating Material	Coating Breakdown Voltage
MKU777-060	MKU	60	68 ± 8%	Brown	Epoxy	1.5KVac / 0.5mA / 3sec
Description	Toroidal MKU Core					

### Core Dimensions

Dimensions	Before Coating		After Coating		Min / Max
	inch	mm	inch	mm	
OD	3.063	77.80	3.108	78.90	Max
ID	1.938	49.20	1.898	48.20	Min
HT	0.500	12.70	0.545	13.84	Max

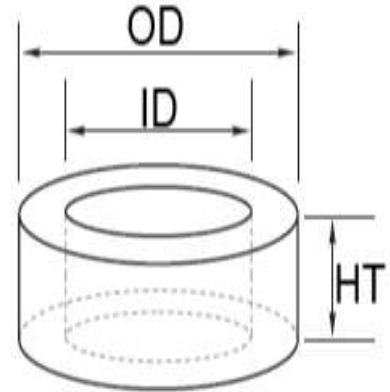

### Physical Characteristics & Packaging

Path Length Le (cm)	Cross Section Ae (cm <sup>2</sup> )	Core Volume Ve (cm <sup>3</sup> )	Window Area Wa (cm <sup>2</sup> )	Weight (g)	Box QTY (pcs)
20.000	1.770	34.700	17.990	241 ± 5%	64

### Electrical Features (@25°C±2°C)

Test Item	Condition	Value (Typical)
Inductance	∅1.0 mm, 50TS, 100KHz, 1.0V, 0A	170uH±8%
DC-Bias	∅1.0 mm, 50TS, 100KHz, 1.0V, I <sub>DC(100 Oe)</sub> =31.84 A	60% Min
Core Loss	∅1.0mm, 50TS, 50KHz, 1000Gauss	340mW/cm <sup>3</sup> Max
Hi-Pot	1.5KVac, 0.5mA, 3 sec	PASS

### DC Bias Curves

