




## Specification of Magnetic Powder Core

Mirrack  
[www.mirrack.com\(CN\)](http://www.mirrack.com(CN))  
[www.mirrack.com.cn\(EN\)](http://www.mirrack.com.cn(EN))

Part Number	Product Series	Permeability (u)	$A_L$ (nH/N <sup>2</sup> )	Coating Color	Coating Material	Coating Breakdown Voltage
MKS508-075	MKS	75	91±8%	Black	Epoxy	1.5KVac / 0.5mA / 3sec
Description	Toroidal Sendust Core					

### Core Dimensions

Dimensions	Before Coating		After Coating		Min / Max
	inch	mm	inch	mm	
OD	2.000	50.80	2.035	51.69	Max
ID	1.250	31.80	1.218	30.94	Min
HT	0.530	13.50	0.565	14.35	Max

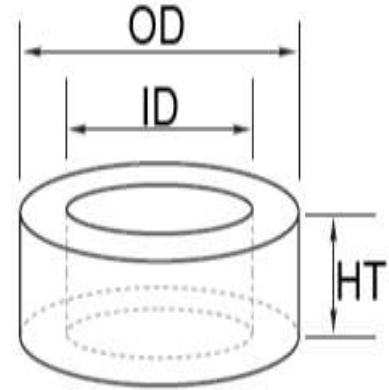

### Physical Characteristics & Packaging

Path Length Le (cm)	Cross Section Ae (cm <sup>2</sup> )	Core Volume Ve (cm <sup>3</sup> )	Window Area Wa (cm <sup>2</sup> )	Weight (g)	Box QTY (pcs)
12.73	1.251	15.93	7.5	97.5±5%	120

### Electrical Features (@25°C±2°C)

Test Item	Condition	Value (Typical)
Inductance	∅1.0 mm, 50TS, 100KHz, 1.0V, 0A	227.5uH±8%
DC-Bias	∅1.0 mm, 50TS, 100KHz, 1.0V, $I_{DC(100Oe)} = 20.27$ A	38% Min
Core Loss	∅1.0mm, 50TS, 50KHz, 1000Gauss	320mW/cm <sup>3</sup> Max
Hi-Pot	1.5KVac, 0.5mA, 3 sec	PASS

### DC Bias Curves

