




## Specification of Magnetic Powder Core

Mirrack  
[www.mirrack.com\(CN\)](http://www.mirrack.com(CN))  
[www.mirrack.com.cn\(EN\)](http://www.mirrack.com.cn(EN))

Part Number	Product Series	Permeability (u)	A <sub>L</sub> (nH/N <sup>2</sup> )	Coating Color	Coating Material	Coating Breakdown Voltage
MKF127-090	MKF	90	40±8%	Blue	Epoxy	800Vac / 0.5mA /3sec
Description	Toroidal Si-Fe Core					

### Core Dimensions

Dimensions	Before Coating		After Coating		Min / Max
	inch	mm	inch	mm	
OD	0.500	12.70	0.530	13.46	Max
ID	0.300	7.62	0.275	6.99	Min
HT	0.187	4.75	0.217	5.51	Max

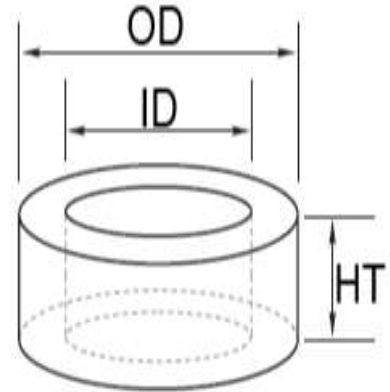

### Physical Characteristics & Packaging

Path Length Le (cm)	Cross Section Ae (cm <sup>2</sup> )	Core Volume Ve (cm <sup>3</sup> )	Window Area Wa (cm <sup>2</sup> )	Weight (g)	Box QTY (pcs)
3.120	0.114	0.356	0.383	2.8±5%	8000

### Electrical Features (@25°C±2°C)

Test Item	Condition	Value (Typical)
Inductance	∅0.5 mm, 40TS, 100KHz, 1.0V, 0A	64uH±8%
DC-Bias	∅0.5 mm,40TS, 100KHz, 1.0V, I <sub>DC(100 Oe)</sub> = 6.24 A	45%Min
Core Loss	∅0.5mm, 40TS, 50KHz, 1000Gauss	520mW/cm <sup>3</sup> Max
Hi-Pot	800Vac,0.5mA, 3 sec	PASS

### DC Bias Curves

