




Specification of Magnetic Powder Core

Mirrack
[www.mirrack.com\(CN\)](http://www.mirrack.com(CN))
[www.mirrack.com.cn\(EN\)](http://www.mirrack.com.cn(EN))

Part Number	Product Series	Permeability (u)	A_L (nH/N ²)	Coating Color	Coating Material	Coating Breakdown Voltage
MKF358-075	MKF	75	70±8%	Blue	Epoxy	1.2KVac / 0.5mA /3sec
Description	Toroidal Si-Fe Core					

Core Dimensions

Dimensions	Before Coating		After Coating		Min / Max
	inch	mm	inch	mm	
OD	1.410	35.80	1.442	36.63	Max
ID	0.880	22.40	0.848	21.54	Min
HT	0.412	10.50	0.444	11.28	Max

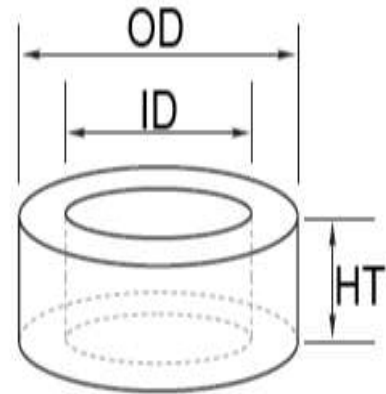

Physical Characteristics & Packaging

Path Length Le (cm)	Cross Section Ae (cm ²)	Core Volume Ve (cm ³)	Window Area Wa (cm ²)	Weight (g)	Box QTY (pcs)
8.98	0.678	6.09	3.64	40.5 ± 5%	441

Electrical Features (@25°C±2°C)

Test Item	Condition	Value (Typical)
Inductance	∅1.0 mm, 50TS, 100KHz, 1.0V, 0A	175uH±8%
DC-Bias	∅1.0 mm, 50TS, 100KHz, 1.0V, $I_{DC(100 Oe)} = 14.36$ A	55%Min
Core Loss	∅1.0mm, 50TS, 50KHz, 1000Gauss	520mW/cm ³ Max
Hi-Pot	1.2KVac, 0.5mA, 3 sec	PASS

DC Bias Curves

