




Specification of Magnetic Powder Core

Mirrack
 www.mirrack.com(CN)
 www.mirrack.com.cn (EN)

Part Number	Product Series	Permeability (u)	A_L (nH/N ²)	Coating Color	Coating Material	Coating Breakdown Voltage
MKF330H-090	MKF	90	76.5±8%	Blue	Epoxy	1.2KVac / 0.5mA /3sec
Description Toroidal Si-Fe Core						

Core Dimensions

Dimensions	Before Coating		After Coating		Min / Max
	inch	mm	inch	mm	
OD	1.300	33.00	1.332	33.83	Max
ID	0.785	19.90	0.760	19.30	Min
HT	0.345	8.76	0.382	9.70	Max

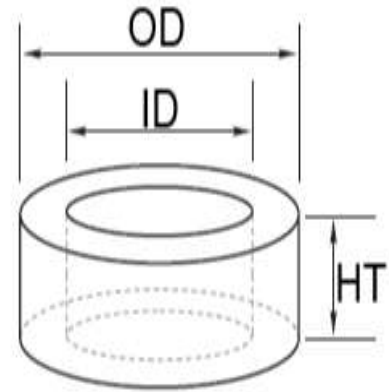

Physical Characteristics & Packaging

Path Length Le (cm)	Cross Section Ae (cm ²)	Core Volume Ve (cm ³)	Window Area Wa (cm ²)	Weight (g)	Box QTY (pcs)
8.147	0.551	4.49	2.926	29±5%	441

Electrical Features (@25°C±2°C)

Test Item	Condition	Value (Typical)
Inductance	∅1.0 mm, 50TS, 100KHz, 1.0V, 0A	191.25uH±8%
DC-Bias	∅1.0 mm, 50TS, 100KHz, 1.0V, $I_{DC(100\text{Oe})} = 13.04\text{ A}$	45%Min
Core Loss	∅1.0mm, 50TS, 50KHz, 1000Gauss	520mW/cm ³ Max
Hi-Pot	1.2KVac,0.5mA, 3 sec	PASS

DC Bias Curves

