




## Specification of Magnetic Powder Core

Mirrack  
 www.mirrack.com(CN)  
 www.mirrack.com.cn  
 (FN)

Part Number	Product Series	Permeability (u)	$A_L$ (nH/N <sup>2</sup> )	Coating Color	Coating Material	Coating Breakdown Voltage
MKU270H-026	MKU	26	22±8%	Brown	Epoxy	1.2KVac / 0.5mA / 3sec
Description	Toroidal MKU Core					

### Core Dimensions

Dimensions	Before Coating		After Coating		Min / Max
	inch	mm	inch	mm	
OD	1.060	26.90	1.090	27.70	Max
ID	0.580	14.70	0.555	14.10	Min
HT	0.340	8.64	0.372	9.45	Max

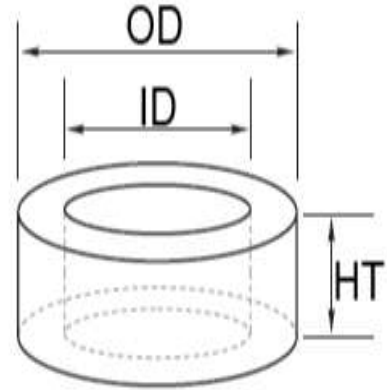

### Physical Characteristics & Packaging

Path Length Le (cm)	Cross Section Ae (cm <sup>2</sup> )	Core Volume Ve (cm <sup>3</sup> )	Window Area Wa (cm <sup>2</sup> )	Weight (g)	Box QTY (pcs)
6.352	0.497	3.155	1.560	22±5%	576

### Electrical Features (@25°C±2°C)

Test Item	Condition	Value (Typical)
Inductance	∅0.5mm, 50TS, 100KHz, 1.0V, 0A	55uH±8%
DC-Bias	∅0.5mm, 50TS, 100KHz, 1.0V, I <sub>DC(100 Oe)</sub> = 10.11 A	82% Min
Core Loss	∅0.5mm, 50TS, 50KHz, 1000Gauss	670mW/cm <sup>3</sup> Max
Hi-Pot	1.2KVac, 0.5mA, 3 sec	PASS

### DC Bias Curves

