




Specification of Magnetic Powder Core

Mirrack
 www.mirrack.com(CN)
 www.mirrack.com.cn (EN)

Part Number	Product Series	Permeability (u)	A _L (nH/N ²)	Coating Color	Coating Material	Coating Breakdown Voltage
MKF203-060	MKF	60	32±8%	Blue	Epoxy	800Vac / 0.5mA /3sec
Description	Toroidal Si-Fe Core					

Core Dimensions

Dimensions	Before Coating		After Coating		Min / Max
	inch	mm	inch	mm	
OD	0.800	20.30	0.830	21.10	Max
ID	0.500	12.70	0.475	12.07	Min
HT	0.250	6.35	0.286	7.11	Max

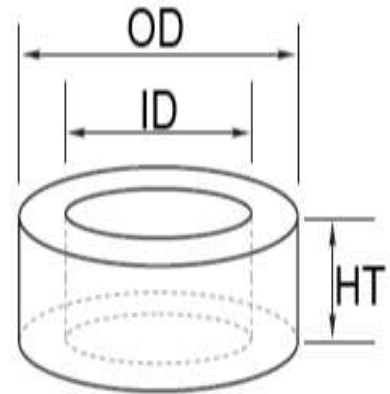

Physical Characteristics & Packaging

Path Length Le (cm)	Cross Section Ae (cm ²)	Core Volume Ve (cm ³)	Window Area Wa (cm ²)	Weight (g)	Box QTY (pcs)
5.09	0.226	1.15	1.14	8.5 ± 5%	2400

Electrical Features (@25°C±2°C)

Test Item	Condition	Value (Typical)
Inductance	∅0.5 mm, 50TS, 100KHz, 1.0V, 0A	80uH±8%
DC-Bias	∅0.5 mm, 50TS, 100KHz, 1.0V, I _{DC(100 Oe)} = 8.144 A	70%Min
Core Loss	∅0.5mm, 50TS, 50KHz, 1000Gauss	620mW/cm ³ Max
Hi-Pot	800Vac, 0.5mA, 3 sec	PASS

DC Bias Curves

