




Specification of Magnetic Powder Core

Mirrack
 www.mirrack.com(CN)
 www.mirrack.com.cn (EN)

Part Number	Product Series	Permeability (u)	A_L (nH/N ²)	Coating Color	Coating Material	Coating Breakdown Voltage
MKF229-026	MKF	26	19±8%	Blue	Epoxy	800Vac / 0.5mA /3sec
Description	Toroidal Si-Fe Core					

Core Dimensions

Dimensions	Before Coating		After Coating		Min / Max
	inch	mm	inch	mm	
OD	0.900	22.90	0.930	23.62	Max
ID	0.550	14.07	0.527	13.39	Min
HT	0.300	7.62	0.330	8.38	Max

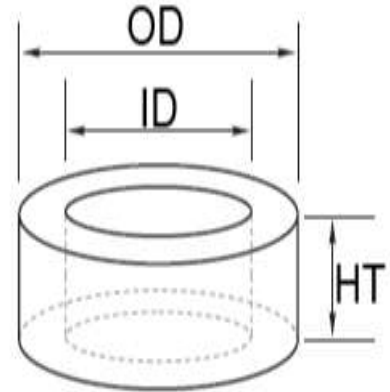

Physical Characteristics & Packaging

Path Length Le (cm)	Cross Section Ae (cm ²)	Core Volume Ve (cm ³)	Window Area Wa (cm ²)	Weight (g)	Box QTY (pcs)
5.67	0.331	1.88	1.41	13±5%	1600

Electrical Features (@25°C±2°C)

Test Item	Condition	Value (Typical)
Inductance	∅0.5 mm, 50TS, 100KHz, 1.0V, 0A	47.5uH±8%
DC-Bias	∅0.5 mm, 50TS, 100KHz, 1.0V, I _{DC(100 Oe)} = 9.072 A	88%Min
Core Loss	∅0.5mm, 50TS, 50KHz, 1000Gauss	820mW/cm ³ Max
Hi-Pot	800Vac,0.5mA, 3 sec	PASS

DC Bias Curves

