




Specification of Magnetic Powder Core

Mirrack
[www.mirrack.com\(CN\)](http://www.mirrack.com(CN))
[www.mirrack.com.cn\(EN\)](http://www.mirrack.com.cn(EN))

Part Number	Product Series	Permeability (u)	A _L (nH/N ²)	Coating Color	Coating Material	Coating Breakdown Voltage
MKF270-090	MKF	90	113±8%	Blue	Epoxy	1.2KVac / 0.5mA /3sec
Description	Toroidal Si-Fe Core					

Core Dimensions

Dimensions	Before Coating		After Coating		Min / Max
	inch	mm	inch	mm	
OD	1.060	26.90	1.090	27.70	Max
ID	0.580	14.70	0.555	14.10	Min
HT	0.440	11.20	0.472	11.99	Max

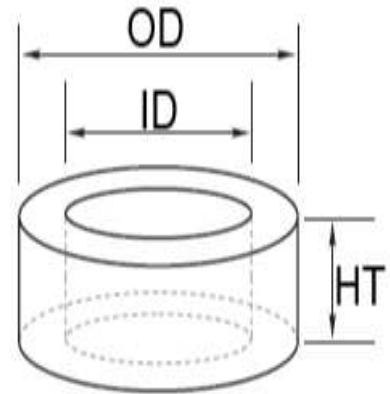

Physical Characteristics & Packaging

Path Length Le (cm)	Cross Section Ae (cm ²)	Core Volume Ve (cm ³)	Window Area Wa (cm ²)	Weight (g)	Box QTY (pcs)
6.35	0.654	4.15	1.56	29±5%	576

Electrical Features (@25°C±2°C)

Test Item	Condition	Value (Typical)
Inductance	∅0.5 mm, 50TS, 100KHz, 1.0V, 0A	282.5uH±8%
DC-Bias	∅0.5 mm, 50TS, 100KHz, 1.0V, I _{DC(100 Oe)} = 10.16 A	45%Min
Core Loss	∅0.5mm, 50TS, 50KHz, 1000Gauss	520mW/cm ³ Max
Hi-Pot	1.2KVac,0.5mA, 3 sec	PASS

DC Bias Curves

